

# Data Sheet

## Argo

Faretti da incasso a pavimento, corpo in alluminio anodizzato, flangia superiore in acciaio inox AISI 316L, luccio o spiccolato, diffusore in policarbonato satinato, fornito con cavo bipolare in neoprene da 50 cm o pressacavo.

*Recessed floor spotlight, anodized aluminum body, shiny or satin AISI 316L steel front, satinated polycarbonate diffuser, provided with a 50 cm long bipolar neoprene cable + cable gland.*

N. luci 1 da 3W  
3 da 3W

Luci no. 1 x 3W  
3 x 3W

Potenza max. 1W circa nella versione a 1 led  
3,3W circa nella versione a 3 led

Power max. 1 W → 1 led version  
3.3W → 3 led version

Alimentazione tramite alimentatore 24V DC, collegamento in parallelo.


Feeding through power supply 24V DC, parallel connection.

Applicazioni Illuminazione di marciapiedi, vicoli, giardini.

Application Lighting of sidewalks, paths, gardens.

Installazione A pavimento tramite cassaferraglia (cod. CA031 per la versione a 1 led o cod. CA061 per la versione a 3 led) e viti suministrati in dotazione.

Installation On the floor through housing box (code CA031 for 1 led version or code CA061 for 3 led version) and self-tapping screws included.

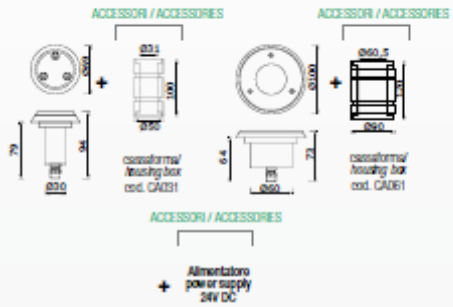

ARTICOLO / ITEM	N. LED / LED N°	COLORE LED / LED COLOR	PACCO / PACK	LED CORTESSA / LED CUT OFF	FINITURA / FINISHING
<b>ARG</b>			<b>6</b>	<b>0</b>	
	1 2	1 2 3 4 5 6	6 24V 1W 3 3 3	0 N/C	1 2