

Data Sheet

Fenice

Faretto da incasso a pavimento, corpo in alluminio anticorrosivo anodizzato, flangia superiore in acciaio inox AISI 316L lucido o spazzolato, diffusore in policarbonato satinato; fornito con cavo bipolare in neoprene da 50 cm e pressacavo.

Recessed floor spotlight, anodized aluminium body, shiny or satinized AISI 316L steel front, satinized polycarbonate diffuser; provided with a 50 cm long bipolar neoprene cable + cable gland.

N. led 3 da 3W

Led no. 3 x 3W

Potenza ass. 3.5 W circa

Power abs. about 3.5 W

Alimentazione Tramite alimentatore 24V DC, collegamento in parallelo.

Feeding Through power supply 24V DC, parallel connection.

Applicazioni Illuminazione marciapiedi, vialetti, giardini.

Application Lighting of sidewalks, paths, gardens.

Installazione A pavimento tramite cassafornia (cod. CA060).


Installation On the floor through housing box (code CA060).

Note Driver elettronico a bordo

Note Electronic driver on board.



ACCESSORI / ACCESSORIES

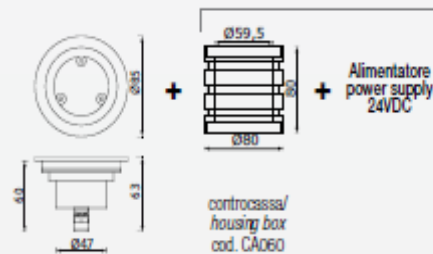

ARTICOLO ITEM	N. LED LED N°	COLORE LED LED COLOUR	FASCIO BEAM	LED CORTESIA COURTESY LED	FINITURA FINISHING
FEN	3		5	0	
	1 CW	2 NW	5 180°	0 NO	I S
	3 WW	4 RR			
	5 GG	6 BB			
	7 CC				