


Data Sheet


Seneca *new*

Spot orientabile, corpo e staffetta in alluminio anodizzato, ottica in PMMA, finitura grigia o nera


N. led	5 led da 3W	Led no.	5x3W
Potenza ass.	6W circa	Power abs.	about 6W
Alimentazione	Tramite alimentatore 24V DC, collegamento in parallelo.	Feeding	Through power supply 24V DC, parallel connection.
Applicazioni	Illuminazione d'effetto di statue, quadri, nicchie, ingressi.	Application	Accent lighting of statues, pictures, niches, entrances.
Installazione	Mediante staffa in dotazione	Installation	Through support included
Note	Driver elettronico a bordo	Note	Electronic driver on board

Adjustable spot, body and support made of anodized aluminium, PMMA optics, grey or black finishing





ACCESSORI / ACCESSORIES

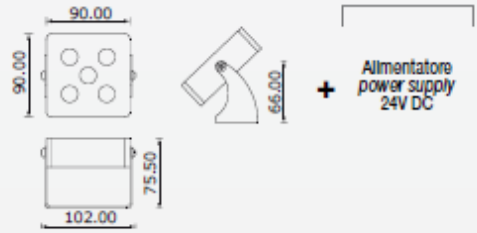

+ Alimentatore power supply 24V DC




ARTICOLO ITEM	N. LED LED NO.	COLORE LED LED COLOUR	FASCIO BEAM	LED CORTESIA COURTESY LED	FINITURA FINISHING
SEN	5			0	A N

1 CW	2 NW	1 ▲ 15°	0 NO	A	N
3 WW		2 ▲ 30°			
		3 ▲ 60°			

Curve fotometriche / Photometric diagrams

I diagrammi sottostanti e le relative tabelle indicano il diametro di apertura dei diversi fasci e il livello d'illuminamento di un singolo led espresso in Lux (E0= illuminamento massimo, E1= illuminamento minimo, Em= illuminamento medio). Per apparecchi dotati di più led, tali valori dovranno essere moltiplicati per il numero complessivo di led presenti nell'apparecchio. I valori di riferimento si riferiscono a 1 led NW da 1W con emissione 100 Lm; si tratta tuttavia di valori puramente indicativi e soggetti a modifiche che l'Azienda può apportare senza preavviso.

The following diagrams and the relevant tables indicate the diameters of the different beams and the level of brightness of a single led expressed in Lux (E0= maximum brightness, E1= minimum brightness, Em= medium brightness). In case of fixtures containing more than 1 led, the values must be multiplied by the total number of leds in the spot. The values refer to 1 NWx1W emitting 100Lm; anyhow they're indicative values since they can undergo some changes without any previous notice.

FASCIO 15° BEAM 15°						FASCIO 30° BEAM 30°						FASCIO 60° BEAM 60°								
ALTEZZA H/HEIGHT	NUM. LED LED NO.	Ø FASCIO Ø BEAM	E0 MAX	E1 75°	E MEDIO MEDIANE	ALTEZZA H/HEIGHT	NUM. LED LED NO.	Ø FASCIO Ø BEAM	E0 MAX	E1 15°	E MEDIO MEDIANE	ALTEZZA H/HEIGHT	NUM. LED LED NO.	Ø FASCIO Ø BEAM	E0 MAX	E1 30°	E MEDIO MEDIANE			
	1 mt.	1	0,21	760	530	645		1 mt.	1	0,53	330	230	280		1 mt.	1	1,15	130	92	106
	2 mt.	1	0,42	140	100	120		2 mt.	1	1,07	80	56	68		2 mt.	1	2,30	30	22	26
	3 mt.	1	0,63	60	42	51		3 mt.	1	1,60	40	28	34		3 mt.	1	3,46	20	14	17