

LED



NEW 2014



VESPUCCI


Profilo (Ø 45mm), ideale per l'illuminazione generale, velette, nicchie, sottopensili, armadi, stand espositivi, corrimano, facciate

Profile (Ø 45mm), ideal for general lighting, niches, under-cupboards, wardrobes, stands, handrails, façades.

| | |
|--------------------------|---|
| Materiale | Profilo in PMMA trasparente Dissipatore interno e tappi di chiusura in alluminio anodizzato e sabbiato N° 2 finiture standard |
| Numero led | 1/2/4 moduli da 9W |
| Potenza assorbita | 9W (Forma S) 18W (Forma M) 36W (Forma X) |
| Collegamento | A rete 230Vac |
| Cablaggio | Fornito con 50cm di cavo in neoprene e pressacavo |
| Installazione | A parete/soffitto mediante staffe (fornite) |
| Alimentatore | (incluso) 230V ac |
| Fotometrie | p. 412 |

| | |
|--------------------------|---|
| Material | Transparent PMMA profile Internal heatsink and closing caps made of anodized and satinized aluminium No 2 standard finishings |
| Led no. | 1/2/4 x 9W modules |
| Potenza assorbita | 9W (Option S) 18W (Option M) 36W (Option X) |
| Connection | 230V ac |
| Wiring | Provided with a 50cm long neoprene cable + cable gland |
| Installation | On the wall/ceiling through brackets (included) |
| Power supply | (included) 230V ac |
| Photometries | p. 412 |


vespucci s

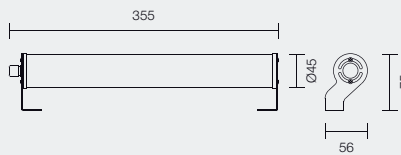

IP65 kg 0,90

| CODE | OPTIONS | SUPPLY | N°LED | LED COLOUR | OPTICS | WATT | FINISHING | DIMMER |
|------------|----------------|------------------|----------|---|-----------------|----------|--|------------------|
| VES | ... | ... | ... | ... | ... | ... | ... | ... |
| | S 355mm | R 230V ac | 1 | 2 ○ 4000°K 3 ○ 3000°K W ○ 2700°K | 4 ■ 120° | 9 | M <input type="checkbox"/> Satinized PMMA P <input type="checkbox"/> PMMA | + TRIAC dimmable |


vespucci M

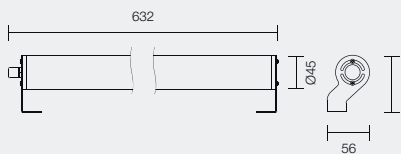

IP65 kg 1,5

| CODE | OPTIONS | SUPPLY | N°LED | LED COLOUR | OPTICS | WATT | FINISHING | DIMMER |
|------------|----------------|------------------|----------|---|-----------------|----------|--|------------------|
| VES | ... | ... | ... | ... | ... | ... | ... | ... |
| | M 632mm | R 230V ac | 2 | 2 ○ 4000°K 3 ○ 3000°K W ○ 2700°K | 4 ■ 120° | 9 | M <input type="checkbox"/> Satinized PMMA P <input type="checkbox"/> PMMA | + TRIAC dimmable |

vespucci x

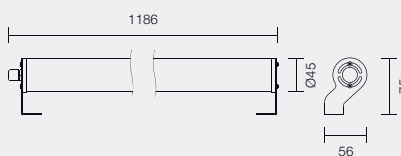

IP65 kg 2,65

| CODE | OPTIONS | SUPPLY | N°LED | LED COLOUR | OPTICS | WATT | FINISHING | DIMMER |
|------------|-----------------|------------------|----------|---|-----------------|----------|--|------------------|
| VES | ... | ... | ... | ... | ... | ... | ... | ... |
| | X 1186mm | R 230V ac | 4 | 2 ○ 4000°K 3 ○ 3000°K W ○ 2700°K | 4 ■ 120° | 9 | M <input type="checkbox"/> Satinized PMMA P <input type="checkbox"/> PMMA | + TRIAC dimmable |